




TruDefinition®

DURATION FLEX®

Shingles with Patented SureNail® Technology



Storm Cloud¹





Summer Harvest¹

HELP PROTECT WITH THE POWER OF FLEX

TruDefinition® Duration FLEX® Shingles with SureNail® Technology

Your shingles need to help protect your home on a daily basis. Duration FLEX® shingles are more flexible than standard shingles, for enhanced durability and performance in varying environmental conditions, including storms and cold weather installation. And they're the only SBS modified polymer shingle that also comes with the advanced performance of patented SureNail® Technology for added confidence in windy conditions.

Duration FLEX® shingles include:

- Patented SureNail® Technology for exceptional wind resistance
- Limited Lifetime Warranty*†
- 130-MPH Wind Resistance Limited Warranty*
- StreakGuard™ Protection with a 25-year Algae Resistance Limited Warranty^{3/5}
- Popular color options, ranging from rich and subtle to lively and vibrant.



Made with a proprietary blend of SBS polymer modified asphalt

The rubberizing effect of our uniquely blended SBS modified asphalt makes the shingles pliable and gives them greater flexibility than standard shingles. The result is a premium architectural asphalt shingle with enhanced durability and toughness to help deliver lasting protection for your home.

Duration FLEX® Shingles

- Feature SureNail® Technology which gives a **42% better nail-pull resistance** against the wind versus standard shingles.^{††}
- Have built-in flexibility to help resist cracking and tearing, in all-weather installation conditions — **over 10% stronger tear strength than traditional shingles.**^{††}
- **Lays flat faster** than standard shingles.^{††}
- Offer rubber-like flexibility to withstand expansion and contraction stresses and helps **minimize loss of granules** which help to protect the shingle against UV.
- Help absorb the energy of the impact of hail or storm debris; have the **highest impact rating**; UL 2218 Class 4 and may qualify for a homeowner insurance discount.⁶



Onyx Black¹

TRUDEFINITION® DURATION FLEX® SHINGLES

Add style to your home with premium color blends in a range of choices from subtle to vibrant.

Rich, sophisticated classic hues




Brownwood¹




Driftwood¹



Estate Gray¹

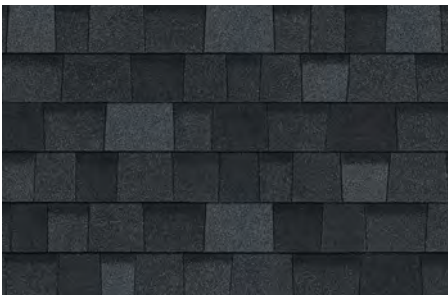


Onyx Black¹

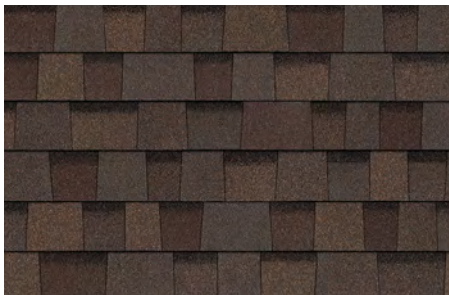

Teak¹


Vibrant, dimensional color combinations

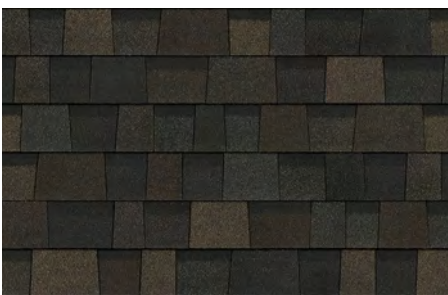


Black Sable^{1/4}



Sand Dune¹

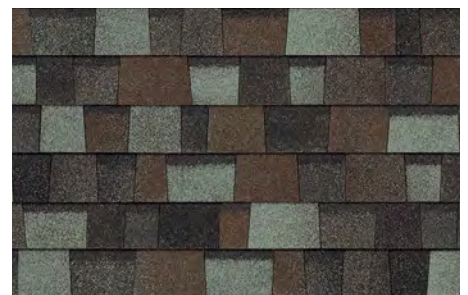

Storm Cloud¹

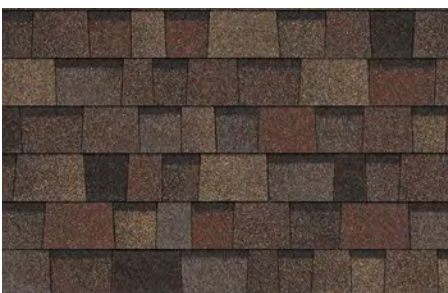

Summer Harvest¹

COLOR DISCLAIMER

As color experts, we know getting the shingle color right is a big part of any roofing purchase. Due to printing color variations, in addition to viewing shingle literature, we suggest you request an actual shingle sample to see how it will appear on your home and with your home's exterior elements in various natural lighting conditions. Lastly, we recommend you verify your color choice by seeing it installed on an actual home; your roofing contractor or supplier can provide a sample and may be able to direct you to a local installation.

THE ONLY SBS SHINGLE WITH SURENAIL® TECHNOLOGY

When performance is your priority, choose the shingle that offers you a material difference.

Duration FLEX® shingles are the only SBS modified polymer shingle with the added confidence of patented SureNail® Technology for exceptional wind resistance.

UL 2218, Class 4

Highest rating for impact resistance.

Flexible Shingles

Withstands shingle expansion and contraction; helps resist cracking and tearing.



Excellent Adhesive Power

Helps keep the shingle layers laminated.

Outstanding Grip

The SureNail® strip enhances the already amazing grip of our proprietary Tru-Bond®** sealant for exceptional wind resistance of a 130-MPH wind warranty.*



Breakthrough Design

Patented SureNail® Technology is the first and only reinforced nailing zone on the face of the shingle.

"No Guess" Wide Nailing Zone


This tough, engineered woven-fabric strip is embedded in the shingle to create an easy-to-see strong, durable fastener zone.

Triple Layer Protection®+

A unique "triple layer" of reinforcement occurs when the fabric overlays the two shingle layers, providing increased protection against "nail pull" from the wind.

Double the Common Bond


SureNail® features up to a 200% wider bond between the shingle layers in the nailing zone over standard shingles.

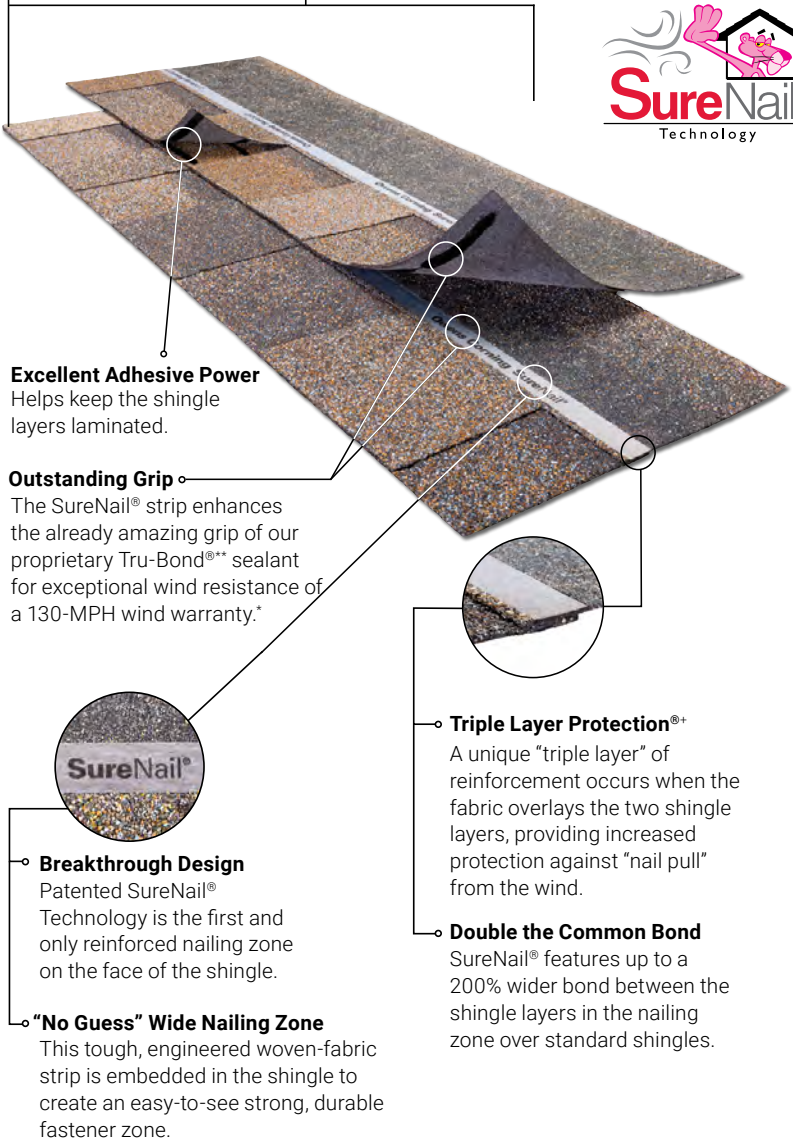

TOTAL PROTECTION ROOFING SYSTEM^{®^}

TOTAL PROTECTION SIMPLIFIED[™]

Owens Corning[®] Total Protection Roofing System[®] integrates engineered Owens Corning[®] components that work together to address these three primary performance areas, critical to a high-performance roof, while also making it easy to understand the importance of each. **With Owens Corning, it's easy to confidently deliver total protection, beauty and peace of mind.**

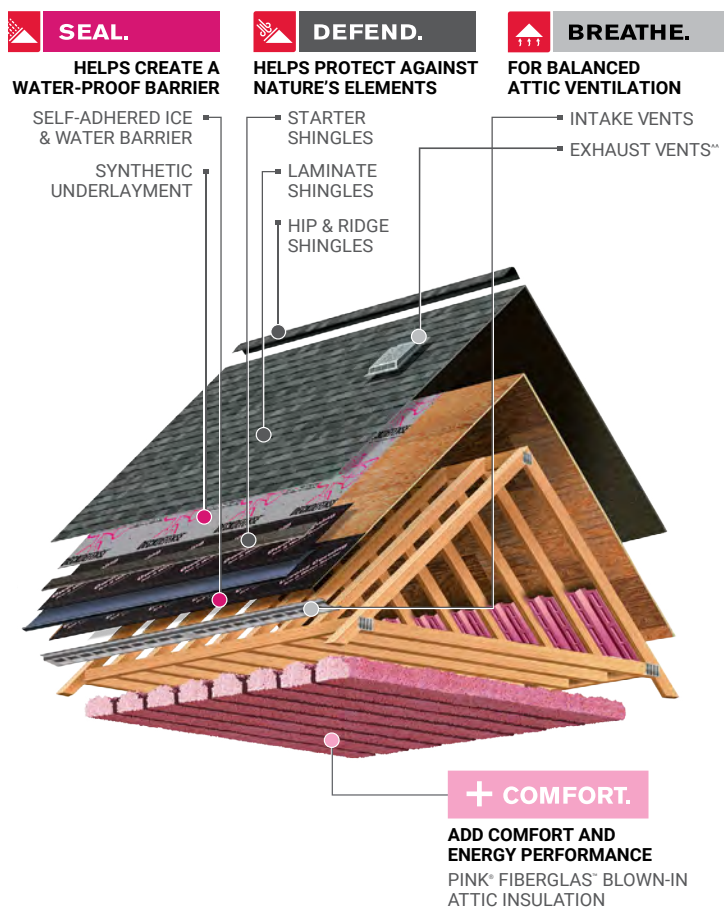

OWENS CORNING ROOFING AND ASPHALT, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OH USA 43659

1-800-GET-PINK[®]
www.owenscorning.com

Pub. No. 10023120-F Printed in U.S.A. December 2022.
THE PINK PANTHER[™] & © 1964-2022 Metro-Goldwyn-Mayer Studios Inc.
All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2022 Owens Corning. All Rights Reserved.

(Brookville, Denver, Irving, Kearny, Medina, Memphis, Minneapolis, Portland, Summit)

Product Attributes

Warranty Length^{**†}

Limited Lifetime (for as long as you own your home)

Wind Resistance Limited Warranty^{*}

130-MPH

Algae Resistance Limited Warranty^{**§}

25 Years

TRU PROtection[®] Non-Prorated Limited Warranty^{*} Period

10 Years

TruDefinition[®] Duration FLEX[®]

Size	13 ¹ / ₄ " x 39 ³ / ₈ "
Application Exposure	5 ⁵ / ₈ "
Shingles per Bundle	Not less than 20
Average Shingle Count per 3 Bundles	64
Average Coverage per 3 Bundles	98.4 sq. ft.

ImpactRidge[®] Hip & Ridge Product Specifications

Exposure	6"
Nominal Size	12" x 36"
Piece Size	12" x 12"
Shingles per Bundle	22
Pieces per Shingle/Bundle	3/66
Lineal Coverage per Bundle	33 ft.

Applicable Standards and Codes

ASTM D3462
CSA A123.5 ^{††}
ASTM D228
ASTM D3018 (Type 1)
ASTM D3161 (Class F Wind Resistance)
ASTM D7158 (Class H Wind Resistance)
ASTM E108/UL 790 (Class A Fire Resistance)
UL 2218 (Class 4 Impact Resistance) [§]
FM4473 (Class 4 Impact Resistance)
PRI ER 1378E01

* See actual warranty for complete details, limitations and requirements.

† 40-year Limited Warranty on commercial projects.

†† Owens Corning[®] testing comparing Duration FLEX SBS polymer modified shingles to traditional oxidized shingles.

** Tru-Bond[®] is a proprietary premium weathering-grade asphalt sealant that is blended by Owens Corning.

+ The amount of Triple Layer Protection[®] may vary on shingle-to-shingle basis.

++ Only on products sold in Canada.

[^] Excludes non-Owens Corning[®] roofing products such as flashing, fasteners, pipe boots and wood decking.

^{^^} Use of shingle-over ridge vents will affect the impact resistance classification of the ImpactRidge[®] Hip & Ridge Shingles; use off-ridge ventilation as an alternative. Refer to the installation instructions for complete details.

1 See Color Disclaimer Information on page 3 for additional details.

3 Shingles are algae resistant to help control growth of algae and discoloration.

§ This coverage is effective 01/01/2023; Installation must include use of an approved Owens Corning[®] Hip & Ridge Shingle product. See actual warranty for details.

4 Owens Corning[®] Black Sable shingle includes a patented design.

5 ImpactRidge[®] Hip & Ridge Shingles are required to complete UL 2218 Class 4 Impact-Resistant Roof System.

6 Homeowners should check with their insurance company to see if they qualify.

SureNail[®] Technology is not a guarantee of performance in all weather conditions.

For patent information, please visit owenscorning.com/patents.